



PRODUCT SHEET

Tigrus Tilttable


Art. no: 24930-36-3

Ledpro
by NORLUX

Tigrus Tilttable




76-83mm

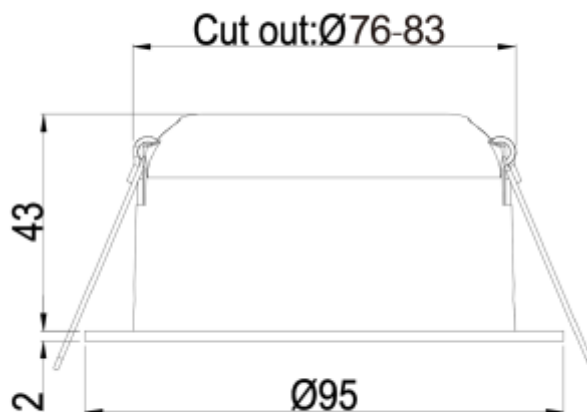

A+

SPECIFICATIONS

Systemeffekt [W]:	7W
Fargetemperatur [K]:	3000K
Fargegjengivelse [CRI/Ra]:	95
Lumen ut (lm):	530lm
Lumen LED (tc=25):	550lm
Spredningsvinkel [°]:	36°
Optikk:	Klar
Dimmetype:	Fasekutt
Flimmerfri:	Ja
Spenning [V]:	230V 50Hz
Tilkobling:	Hurtigkobling
Montering:	Innfelt, Tak
Utsparring [mm]:	Ø76-Ø83mm
Forventet Levetid :	L80B10: 100 000h
Lumen/W:	80lm/W
Fargetoleranse [SDCM]:	3
Farge :	Hvit
Høyde [mm]:	45mm
Bredde [mm]:	95mm
Monteres rett i isolasjon:	Yes, recessed in insulation

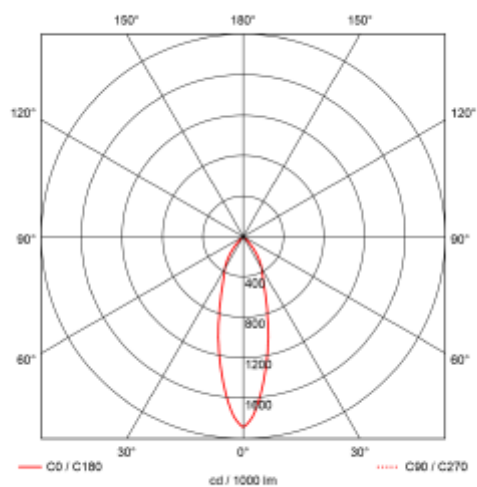

Tigrus Tilttable er en lavtbyggende downlight som kan monteres direkte i isolasjon. CRI>95, tiltbar 25° og IP44. Inkludert dimbar fasekutt driver med hurtigkobling for enkel montering. Utsparring 76-83mm.