




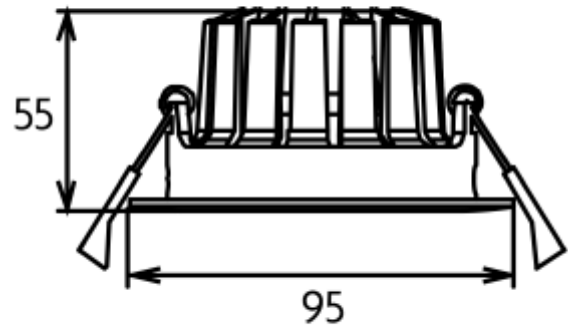
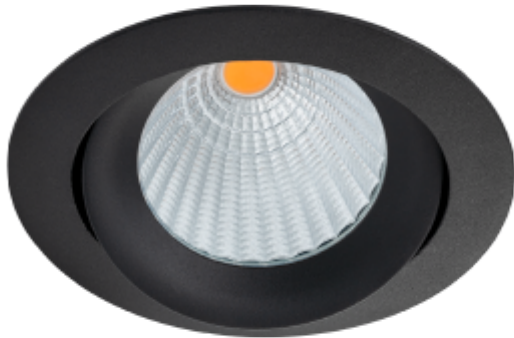
PRODUCT SHEET

Acrux Adjustable
Art. no: 2102-36-2

Ledpro
by NORLUX


Acrux Adjustable

 82-88mm



SPECIFICATIONS

Lyskilde :	LED (innebygget)
Systemeffekt [W]:	10W
Fargetemperatur [K]:	2700K
Fargegjengivelse [CRI/Ra]:	90
Lumen ut (lm):	650lm
Lumen LED (tc=25):	650lm
Spredningsvinkel [°]:	36°
Optikk:	Klar
Dimmetype:	Fasekutt
Spenning [V]:	230V 50Hz
Tilkobling:	Hurtigkobling
Montering:	Innfelt, Tak
Utsparring [mm]:	Ø82-Ø88mm
Forventet Levetid :	L80B10: 50 000h
Lumen/W:	61lm/W
Fargetoleranse [SDCM]:	3
Farge :	Sort
Høyde [mm]:	55mm
Bredde [mm]:	95mm
Monteres rett i isolasjon:	No

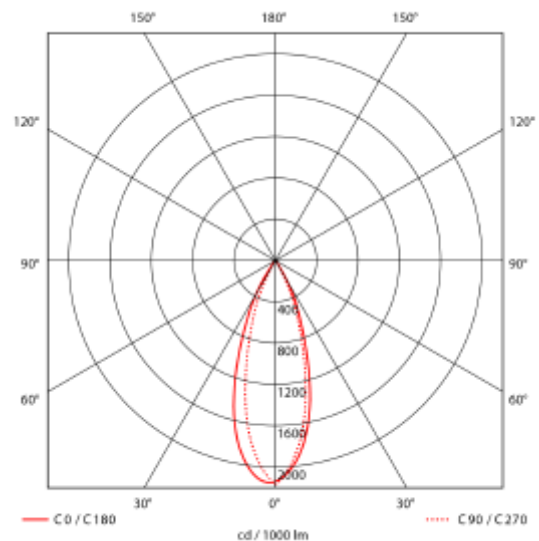

Lavtbyggende tiltbar downlight med IP54 klassifisering garanterer støv- og sprutsikkerhet. Den tilbaketrukne lyskilden kombinert med moderne reflektorteknikk minimerer blending og gir et jevt lys. Perfekt for alle romtyper, særlig bad. Acrux downlight er tilgjengelig i både sort og hvit, og kommer med en inkludert dimbar fasekutt driver for fleksibel lysstyring. Velg variant under.