




PRODUCT SHEET

Base 6000lm 840 Opal 45W IP69K L=1480mm 3m cable PMMA

Art. no: 10254834




Base 6000lm 840 Opal 45W IP69K L=1480mm 3m cabl

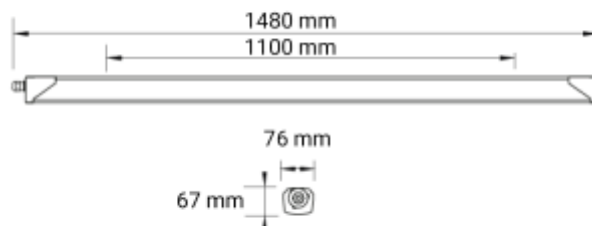

SPECIFICATIONS

Lyskilde :	LED (innebygget)
Systemeffekt [W]:	44W
Fargetemperatur [K]:	4000K
Fargegjengivelse [CRI/Ra]:	80
Lumen ut (lm):	6000lm
Spredningsvinkel [°]:	90°
Optikk:	Opal
Dimmetype:	Ingen
Spenning [V]:	230V 50Hz
Tilkobling:	Kabel 3m
Montering:	Nedhengt, Utenpåliggende, Vegg
Forventet Levetid :	L80B10: 100 000h
Lumen/W:	136lm/W
Fargetoleranse [SDCM]:	3
Farge :	Grå
Lengde [mm]:	1480mm
Høyde [mm]:	67mm
Bredde [mm]:	76mm
Vekt [kg]:	2,3kg

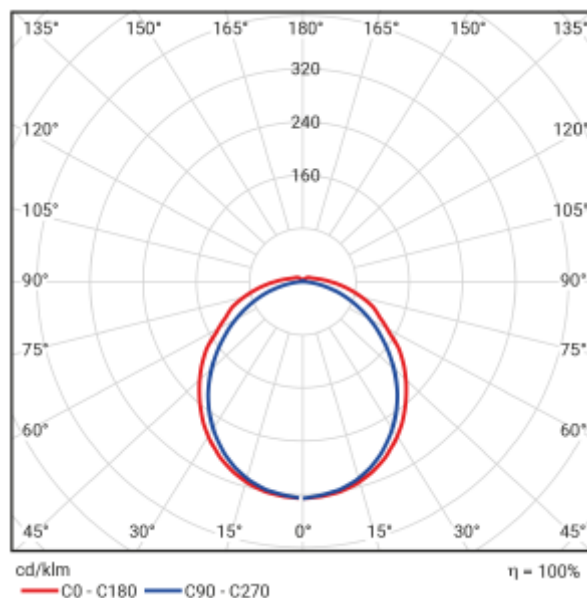

Kompakt gass-tett armatur som er spesielt beregnet for bl.a. bilvask, fjøs og næringsmiddelproduksjon. Innendørs bruk eller ute under tak.

- Hele 136 lm/W og uten flimmer
- Enkel installasjon, ingen verktøy påkrevd og klips kan festes i hele armaturens lengde.
- Gass-tett: hermetisk lukket mot både væske og gass, leveres med 3m kabel.
- Ekstra kjemikalieresistent utgave.