




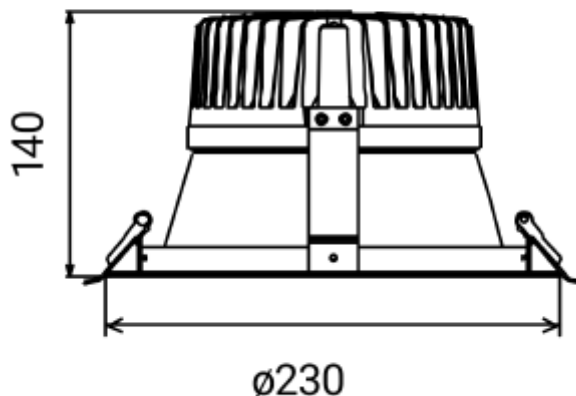
FDV SPEC SHEET

Situla 3200lm 830 45° 35W WH w/o driver

Art. no: 2103-45-3

Ledpro
by NORLUX

 205-220mm



Situla 3200lm 830 45° 35W WH w/o driver



Art. no: 2103-45-3

LYS TEKNISK

Lyskilde :	LED (innebygget)
Lumen ut (lm):	3141
Lumen LED (tc=25):	3200
Spredningsvinkel [°]:	45°
Fargetemperatur [K]:	3000
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830
Fargetoleranse [SDCM]:	3
Optikk:	Klar

MONTERING / TILKOBLING

Tilkobling:	Depending on driver
Utsparring [mm]:	Ø205-Ø220
Montering:	Innfelt, Tak

PRODUKT

Monteres rett i isolasjon:	No
IP-grad:	IP20
Vandal klasse:	IK06
Forventet Levetid :	L80B10: 50 000
Farge :	Hvit
Høyde [mm]:	140

ELEKTRISK DATA

Dimmetype:	Avhengig av driver
Systemeffekt [W]:	35
Spennings [V]:	230V 50Hz
Isolasjonsklasse:	2
Sokkel :	N/A
Strøm LED [mA]:	800
Spennings LED Min [V]:	27
Spennings LED Max [V]:	40