
PRODUCT SHEET
Columba
Art. no: 5711-04-3-ddd

Columba





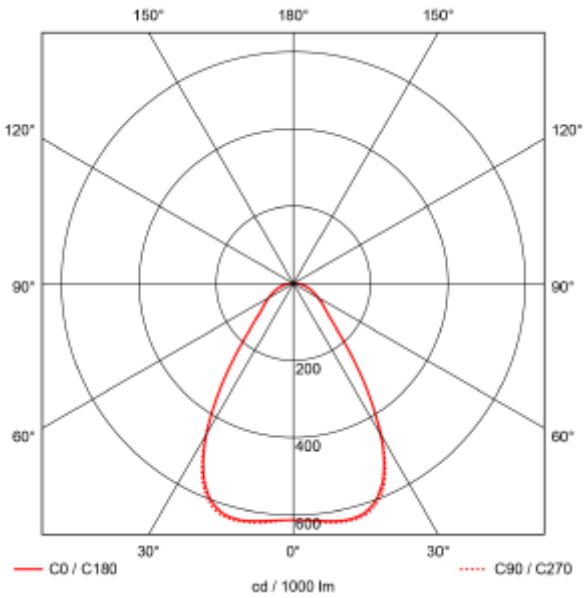

Surface mounted or suspended LED luminaire for use in industry, warehouse, hall and sports arena.
Choose between various editions with different lumen output, optics and DALI2 driver.

IP65 230V 50Hz IK08 A++

SPECIFICATIONS	
Systemeffekt [W]:	59W
Fargetemperatur [K]:	4000K
Fargegjengivelse [CRI/Ra]:	80
Lumen ut (lm):	9921lm
Spredningsvinkel [°]:	90°x90°
Dimmetype:	DALI
Spenning [V]:	230V 50Hz
Montering:	Nedhengt, Tak, Utenpåliggende
Utsparring [mm]:	NAmm
Forventet Levetid :	L80B50: 100 000h
Lumen/W:	169lm/W
Fargetoleranse [SDCM]:	3
Farge :	Hvit
Lengde [mm]:	935mm
Høyde [mm]:	80mm
Bredde [mm]:	114mm
Vekt [kg]:	1,5kg