




PRODUCT SHEET

Pavo P

Art. no: 8017646

Ledpro
by NORLUX

Pavo P




L, mm	W, mm	A, mm	B, mm	C, mm
280	95	135	87	77.5
360	105	196	104	123
410	115	239	157	149.5
500	140	317	191.5	124.5



A⁺

SPECIFICATIONS

Lyskilde :	LED (innebygget)
Systemeffekt [W]:	22W
Fargetemperatur [K]:	3000K
Fargegjengivelse [CRI/Ra]:	80
Lumen ut (lm):	2090lm
Lumen LED (tc=25):	2090lm
Spredningsvinkel [°]:	118
Optikk:	Opal
Dimmetype:	Ingen
Spenning [V]:	230V 50Hz
Tilkobling:	Terminal
Montering:	Tak, Utenpåliggende, Vegg
Forventet Levetid :	L70B50: 40 000h
Lumen/W:	95lm/W
UGR (<=):	22
Fargetoleranse [SDCM]:	5
Farge :	Hvit
Lengde [mm]:	410mm
Høyde [mm]:	115mm
Bredde [mm]:	410mm
Vekt [kg]:	0,9kg
Nøddlys [t]:	3 timer
Nøddlys testfunksjon:	Selvtest

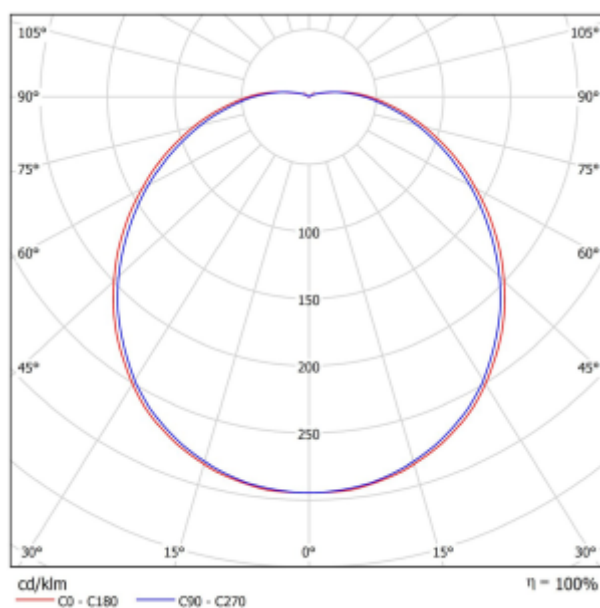

Surface mounted LED plafond with direct light distribution. Opal PMMA diffuser and steel housing. UGR index: =22. IP44. IK02. 3 hours emergency with Selftest.