




## FDV SPEC SHEET


Icarus 500lm 927 36° 7W WH phasecut Isosafe

Art. no: 101970-36-3

**Ledpro**  
by NORLUX

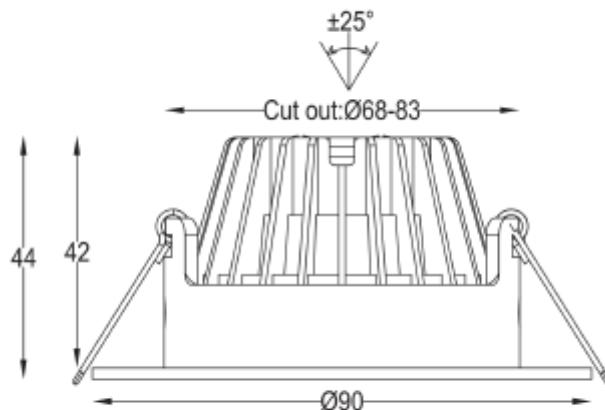

# Icarus 500lm 927 36° 7W WH phasecut Isosafe



Art. no: 101970-36-3

### LYS TEKNISK

Lyskilde :	LED (innebygget)
Lumen ut (lm):	500
Lumen LED (tc=25):	600
Spredningsvinkel [°]:	36
Fargetemperatur [K]:	2700
Fargegjengivelse [CRI/Ra]:	95
Fargekode:	927
Fargetoleranse [SDCM]:	3
Optikk:	Klar

### MONTERING / TILKOBLING

Tilkobling:	Hurtigkobling
Utsparring [mm]:	68-83mm
Montering:	Innfelt



## FDV SPEC SHEET

Icarus 500lm 927 36° 7W WH phasecut Isosafe

Art. no: 101970-36-3



PRODUKT		ELEKTRISK DATA	
Monteres rett i isolasjon:	Yes, recessed in insulation	UGR (<=):	28
IP-grad:	IP20	Dimmetype:	Faseavsnitt
Vandal klasse:	IK02	Dimming Output Type:	Amplitude Modulation
Driftstemperatur [°C]:	-20 - 45	Dimming Phasecut Type:	Leading / Trailing edge
Forventet Levetid :	L80: 100 000	Flimmerfri:	Ja
Farge :	Hvit	Standby power Psb (W) <:	0,5
RAL:	RAL9010	Flicker metric (Pst LM) <:	0,034
Høyde [mm]:	44	Stroboscopic effect metric (SVM) <	0,021
Diameter [mm]:	90	Systemeffekt [W]:	7
Vekt [kg]:	0,3611111111111111	Spennings [V]:	230V 50Hz
Hoved Materiale:	Aluminium	Isolasjonsklasse:	2
Diffusere Materiale:	Aluminium	Belastning pr kurs - B10:	140
Materiale 2:	Polycarbonate	Belastning pr kurs - B16:	225
		Belastning pr kurs - C10:	280
		Belastning pr kurs - C16:	448
		Lekkasjestrøm [mA]:	5
		Startstrøm I <sub>max</sub> [A]:	8
		Startstrøm tid [µs]:	13,5
		Sokkel :	N/A
		Strøm LED [mA]:	350
		Spennings LED Min [V]:	13
		Spennings LED Max [V]:	16
		Nøddlys [t]:	Uten nøddlys