




## FDV SPEC SHEET

Maia 6000lm 830 75° 60W Silver DALI

Art. no: 2180-120-1-ddd

**Ledpro**  
by NORLUX

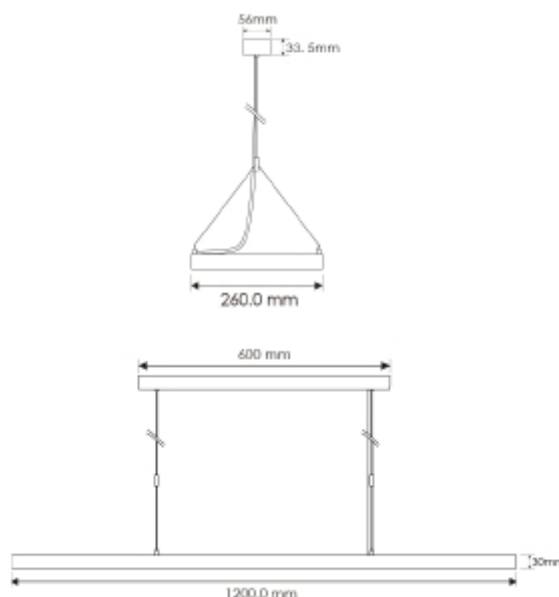

# Maia 6000lm 830 75° 60W Silver DALI



Art. no: 2180-120-1-ddd

### LYS TEKNISK

Lyskilde:	LED (innebygget)
Lumen ut (lm):	6500
Lumen LED (tc=25):	6000
Spredningsvinkel [°]:	75°
Fargetemperatur [K]:	3000
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830
Fargetoleranse [SDCM]:	3
Optikk:	Micropris.
UGR (<=):	19

### MONTERING / TILKOBLING

Tilkobling:	Terminal
-------------	----------



## FDV SPEC SHEET

Maia 6000lm 830 75° 60W Silver DALI

Art. no: 2180-120-1-ddd



PRODUKT	
IP-grad:	IP20
Vandal klasse:	IK08
Driftstemperatur [°C]:	-25 - 45
Forventet Levetid :	L80: 100 000
Farge :	Sølv
RAL:	RAL9006
Lengde [mm]:	1200
Høyde [mm]:	30
Bredde [mm]:	260
Vekt [kg]:	23,5
Hoved Materiale:	Aluminium
Diffusere Materiale:	Polystyrene

ELEKTRISK DATA	
Dimmetype:	DALI2
Dimming Output Type:	Amplitude Modulation
Flimmerfri:	Ja
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	0
Stroboscopic effect metric (SVM) <	0,004
Systemeffekt [W]:	60
Spennning [V]:	230V 50Hz
Isolasjonsklasse:	1
Maks belastning pr kurs - B10:	20
Maks belastning pr kurs - B16:	32
Maks belastning pr kurs - C10:	20
Maks belastning pr kurs - C16:	32
Lekkasjestrøm [mA]:	0,7
Startstrøm I <sub>max</sub> [A]:	8,5
Startstrøm tid [µs]:	214
Sokkel :	N/A
Strøm LED [mA]:	1483
Spennning LED Min [V]:	2,9
Spennning LED Max [V]:	3,3